


ID: **FBCJ-02**

J/A-N(2ZN)H FLAT DROP FRP max. 2F

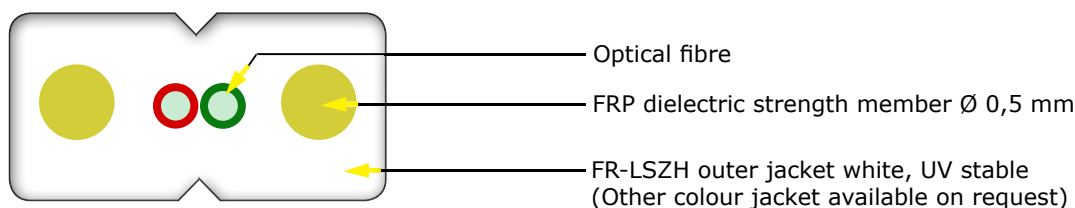

Applications:

- Internal FTTH applications horizontal and riser

Features:

- The mechanical characteristics of jacket meet the requirements of relevant standarts
- Soft, flexible, easy to lay and splice, and with big capacity data transmission
- Meet various requirements of market and clients
- Single mode optical fiber mating ITU-T G.657A
- Reaction to fire class Eca according to fire standard: EN 50575

Cable Parameters:

Parameter	Unit	Value
Crush(short term)	N/100 mm	1000
Strength member		FRP
Storage temperature	°C	-20 to 70
Instalation temperature	°C	-5 to 50
Operating temperature	°C	-20 to 70
Primary buffer diameter	µm	250
Fiber count	n	1 to 2
Nominal outer diameter	mm	2.0x3.0±0.2
Nominal weight	kg/km	8
Maximum tensile load	N	100
Minimum bend radius	mm	15
Drum length	500m, 1000m (Other length available on request)	
Drum size	mm	380x370x340
Fiber colour coding	1.Red, 2.Green (Other fibre colour sequences available on request)	