


ID: **FLRD-06**

J/A-N(ZN)H ROUND DROP max. 6F

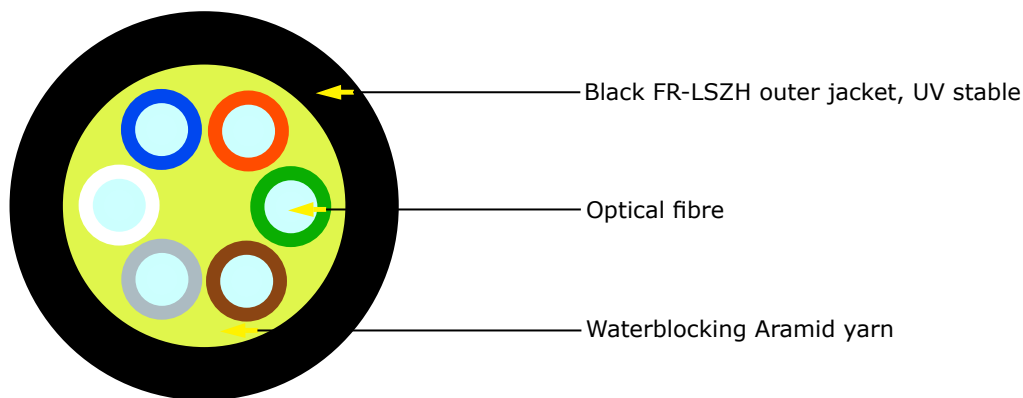

Applications:

- Indoor and outdoor FTTH applications horizontal and riser

Features:

- The mechanical characteristics of jacket meet the requirements of relevant standards
- Soft, flexible, easy to lay and splice, and with big capacity data transmission
- Meet various requirements of market and clients
- Single mode optical fiber mating ITU-T G.657A
- Reaction to fire class Eca according to fire standard: EN 50575

Cable Parameters:

Parameter	Unit	Value
Crush(short term)	N/100 mm	1000
Storage temperature	°C	-20 to 60
Installation temperature	°C	-5 to 50
Operating temperature	°C	-20 to 60
Primary buffer diameter	µm	250
Fiber count	n	2 to 6
Nominal outer diameter	mm	3.0
Nominal weight	kg/km	10
Maximum tensile load	N	500
Minimum bend radius	mm	30
Drum length	m	1000
Drum size	mm	360x360x250
Fiber colour coding	1.Blue, 2.Orange, 3.Green, 4.Brown 5.Grey, 6.White	