




Applications:

Completely equipped splice patch panel with adapter and pigtails.
The Pigtails are stripped off and inserted into the splice cassette.
Easily install and maintain the fiber optic connections.
The maximum number of ports is 24 in simplex variant.
The patch panels are produced in standard 19" dimensions and makes it easy to be mounted in standardized rack patch panel and due to the "movable ears" design they can also be mounted in a cabinet. A removable drawer with splice cassettes provides an easy access to the splice places.

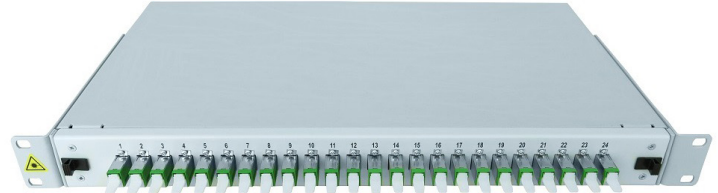

Features:

- 19" Fiber Optic Patch panel, loaded with 24x Adapters E2000/APC, green, ceramic SM, B, screwable and 24x Pigtails E2000/APC, E9/125/900, G652D, 2,5m, LSZH, 12 DIN color, Grade B
- 1U-24 ports, SC simplex (E2000 simplex footprint)
- 24 core
- 2 cable entries
- Movable rack mounting ears
- Size: 484x257x44mm
- Sliding drawer
- Color: grey RAL 7035

